



## LS-5 Series

LS-511/521

## Circuit Breaker Control & Protection

### DESCRIPTION

The LS-5 Series are synchronizer controllers with integrated protective functions. They are designed to enable complex power management applications with multiple incoming mains and bus breakers in combination with easYgen-3400/3500 equipped genset controllers.

The LS-5 devices will manage synchronization, loading and un-loading on each bus segment and send the required voltage and frequency references via CAN bus to the easYgen-3400/3500 genset controllers. LS-5 devices which are located on the incoming mains breakers will automatically detect mains failures and start the corresponding gensets accordingly. Wiring efforts are reduced to a minimum, since only one CAN bus connection is required between all LS-5 and easYgen-3400/3500 controllers. It is not required to wire any AC measurement signals or discrete inputs/outputs between the LS-5 and easYgen-3400/3500 controllers.

Extensive remote control capabilities via discrete inputs or interfaces are provided to easily integrate the LS-5 into each application environment.

The LS-5 Series is available in two different housing versions. The LS-521 with a plastic housing and graphic LCD display is designed to be mounted on the cabinet's front door. The LS-511 with an aluminum powder coated housing without display is designed to be back panel DIN Rail mounted.

### FEATURES

- Up to 16 LS-5 units can be operated in one network with up to 32 easYgen-3400/3500
- Phase match or slip frequency synchronization with voltage matching
- Full protection package ( including df/dt (ROCOF), phase shift and mains voltage increasing protection according to new German grid code requirements in VDE-0126-1-1)
- Segment control for the load sharing
- Event Log with up to 300 entries
- Automatic date and time synchronization between the LS-5 units and the connected easYgen-3400/3500 controls
- LS-5 "Stand alone" mode without the easYgen-3400/3500 is possible
- Preconfigured application modes for the most common applications in the field (MCB or MCB/GGB application)
- Automatic and Manual mode
- Full remote control via CAN or RS-485 interface
- In case transformers are used in the application, vector group adjustment is available
- Breaker open/close failure detection
- Mains decoupling "Test" mode
- Multilingual capability
- Lock Keypad feature
- 8 Freely configurable LED's are available on the LS-511 back panel mountable device
- Designed as solution for complex power management applications
- Up to 16 LS-5 units can be utilized in one application
- Up to 32 bus segments are possible
- Synchronization and protection in one compact controller
- Adjustable vector groups for Synchronization
- Automatic mains failure detection
- Automatic and Manual mode
- LS-5 "Stand alone" mode for use without easYgen-3400/3500 System.
- LogicsManager functionality
- CAN and RS-485 interfaces for remote control and visualization purposes
- True RMS sensing
- Available as cabinet front door mounted device or DIN-Rail backpanel mounted metal housing
- Freely configurable relay outputs
- Freely configurable discrete inputs
- QV monitoring
- Time-dependent voltage monitoring


# SPECIFICATIONS

Power supply.....	12/24 Vdc (8 to 40 Vdc)
Intrinsic consumption .....	max.~ 5 W (LS-511)
.....	max.~ 6 W (LS-521)
Ambient temperature (operation).....	-20 to 70 °C / -4 to 158 °F
Ambient temperature (storage) .....	-30 to 85 °C / -22 to 185 °F
Ambient humidity.....	95 %, non-condensing
<b>Voltage</b> .....	( $\Delta/\Delta$ )
120 Vac [1]    Rated ( $V_{rated}$ ).....	69/120 Vac
Max. value ( $V_{max}$ ).....	86/150 Vac
Rated voltage phase – ground .....	150 Vac
Surge volt. ( $V_{surge}$ ).....	2.5 kV
and 480 Vac [4]    Rated ( $V_{rated}$ ).....	277/480 Vac
Max. value ( $V_{max}$ ).....	346/600 Vac
Rated voltage phase – ground .....	300 Vac
Surge volt. ( $V_{surge}$ ).....	4.0 kV
Accuracy .....	Class 1
Linear measuring range .....	$1.25 \times V_{rated}$
Measuring frequency.....	50/60 Hz (40 to 85 Hz)
High Impedance Input; Resistance per path.....	[1] 0.498 M $\Omega$ , [4] 2.0 M $\Omega$
Max. power consumption per path.....	< 0.15 W
<b>Current (Isolated)</b> Rated ( $I_{rated}$ ).....	[1] ..1 A or [5] ..1/5 A
Linear measuring range .....	$I_{gen} = 1.5 \times I_{rated}$
Burden.....	< 0.15 VA
Rated short-time current (1 s) .....	[1] $50 \times I_{rated}$ , [5] $10 \times I_{rated}$
<b>Discrete inputs</b> .....	isolated
Input range .....	12/24 Vdc (8 to 40 Vdc)
Input resistance.....	approx. 20 kOhms


<b>Relay outputs</b> .....	potential free
Contact material.....	AgCdO
Load (GP) .....	2.00 Aac@250 Vac
2.00 Adc@24 Vdc / 0.36 Adc@125 Vdc / 0.18 Adc@250 Vdc	
Pilot duty (PD).....	1.00 Adc@24 Vdc / 0.22 Adc@125 Vdc / 0.10 Adc@250 Vdc
<b>Housing</b> (LS-521)    Front door mounting.....	Plastic housing
Dimensions            WxHxD .....	219 × 171 × 61 mm
Front cutout            WxH .....	186 [+1.1] × 138 [+1.0] mm
Connection.....	screw/plug terminals 2.5 mm <sup>2</sup>
Front.....	insulating surface
Sealing                Front.....	IP65 (with screw fastening)
Front.....	IP54 (with clamp fastening)
Back .....	IP20
Weight.....	approx. 850 g
<b>Housing</b> (LS-511)    Back panel mounting.....	Sheet metal housing
Dimensions            WxHxD .....	190 × 167 × 47 mm
Connection.....	screw/plug terminals 2.5 mm <sup>2</sup>
Protection system .....	IP 20
Weight.....	approx. 840 g
<b>Disturbance test</b> (CE) .....	tested according to applicable EN guidelines
<b>Listings</b> .....	UL/cUL, GOST-R
<b>Marine</b> .....	LR (Type Approval), ABS (Design Assessment)

## DIMENSIONS


Plastic housing for front panel mounting

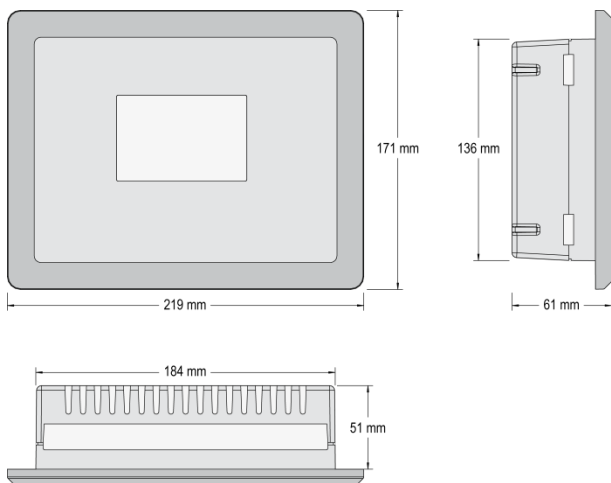

Metal housing for cabinet mounting

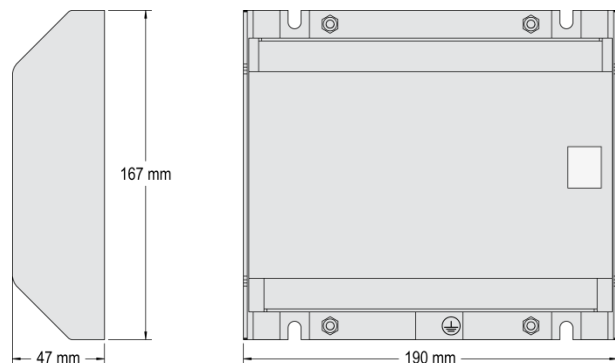

# TERMINAL DIAGRAM

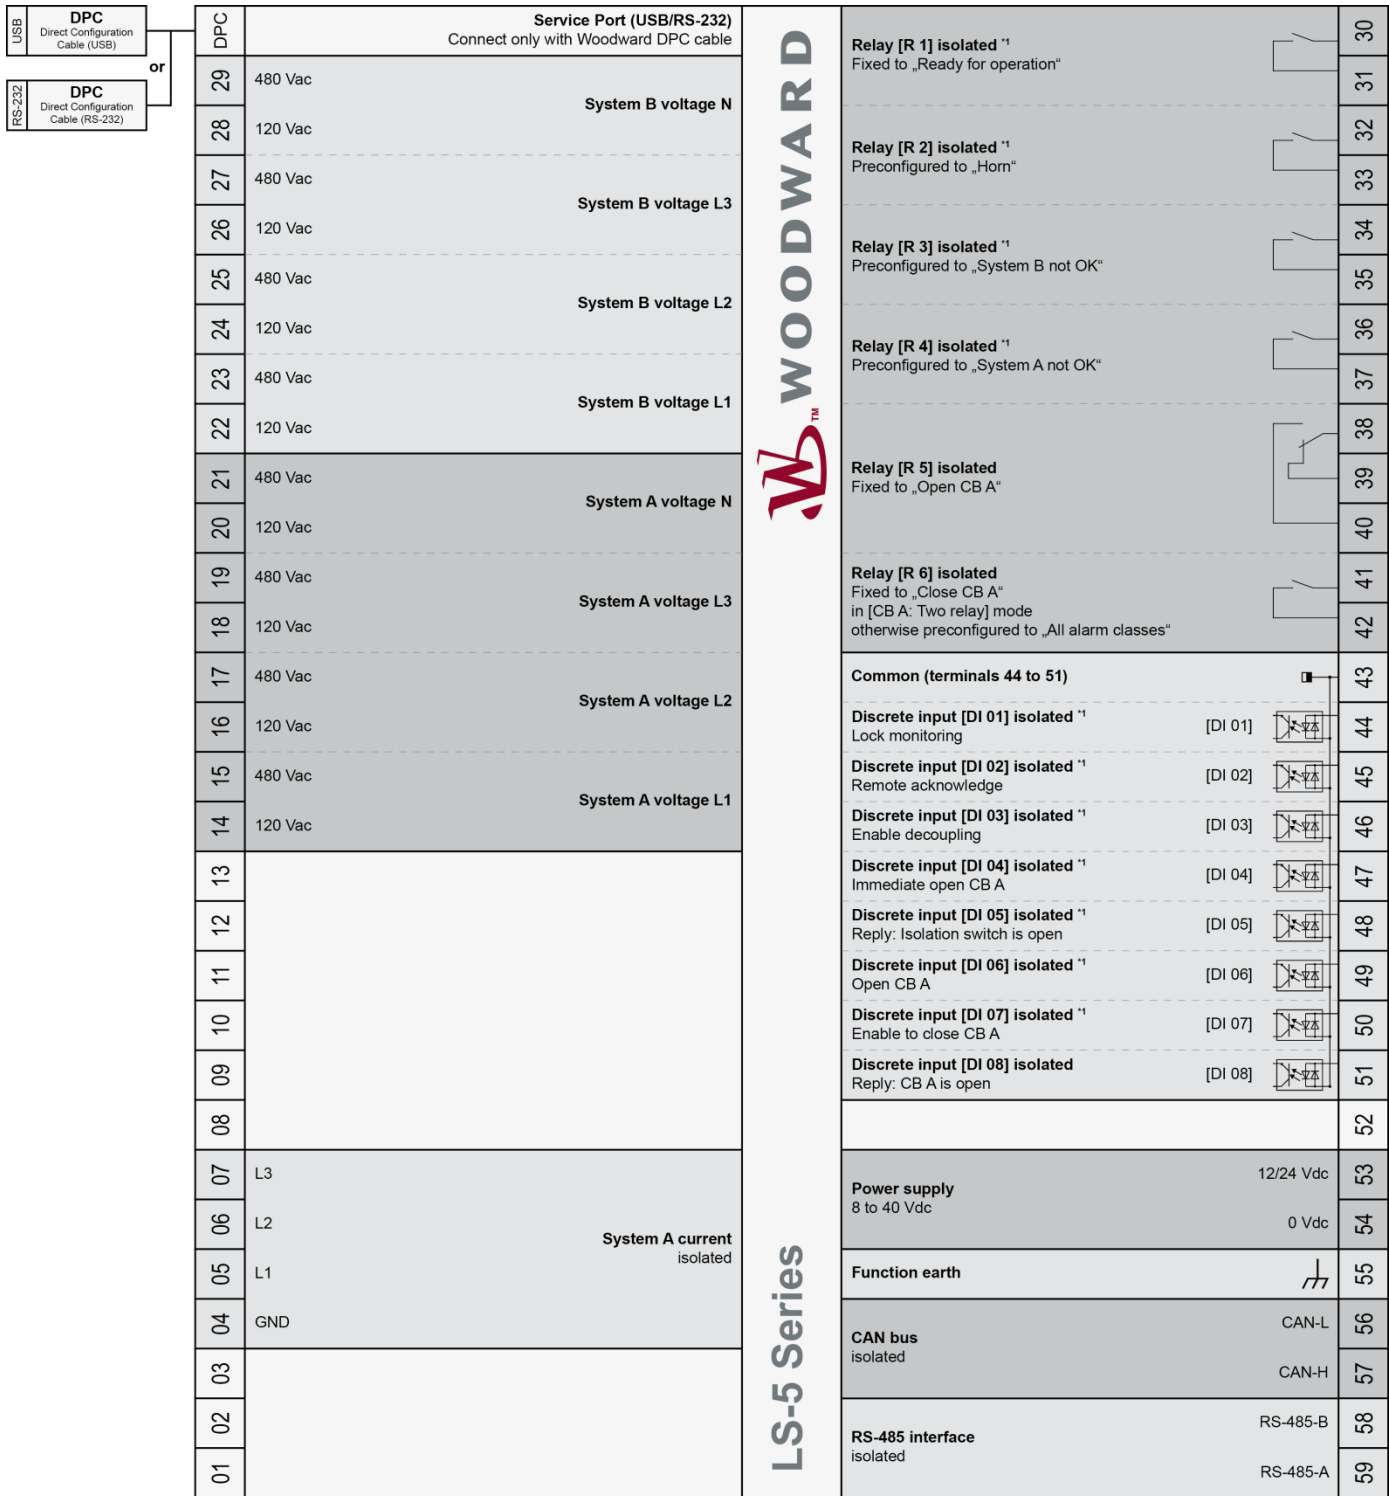


Subject to technical modifications.

\*1 = configurable via LogicsManager

LS-5 Series Wiring Diagram | Rev. A

## EXAMPLE APPLICATION

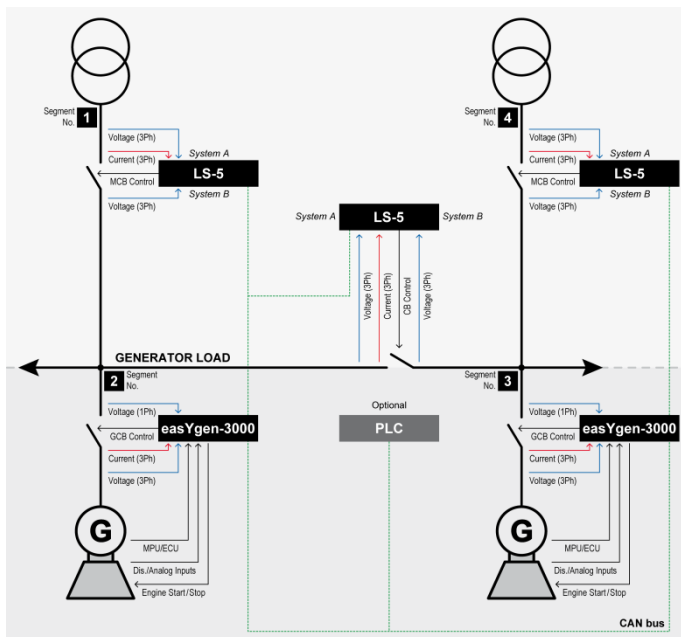

## FEATURES OVERVIEW

[www.woodward.com/power](http://www.woodward.com/power)

For more information contact:

	LS-511	LS-521
<b>I/Os</b>		
Display	No	Yes
Configurable LEDs on Faceplate	Yes	No
System A/B voltage measurement	3-Phases + Neutral	3-Phases + Neutral
System A current measurement	3-Phase	3-Phase
Discrete inputs	8	8
Relay outputs	6	6
CAN Interface	1	1
RS-485 Interface	1	1
<b>Control</b>		
Automatic and Manual operating modes	✓	✓
Breaker synchronization (slip synchronization /phase matching)	✓	✓
Vector group adjustment for synchronization	✓	✓
Configurable dead bus closure direction	✓	✓
<b>HMI</b>		
Configuration via HMI and PC	✓	✓
Event recorder with real time clock (battery backup)	✓	✓
Date and Time Synchronization between LS-5 units and easYgen-3400/3500-P1	✓	✓
<b>Protection</b>		
Over-/undervoltage (59/27)	✓	✓
Over-/underfrequency (81O/U)	✓	✓
Voltage asymmetry (47)	✓	✓
Phase shift (78)	✓	✓
df/dt (ROCOF) (81)	✓	✓
QV monitoring	✓	✓
Time-dependent voltage	✓	✓
Mains voltage increase (accord. to VDE-AR-N-4105)	✓	✓
<b>Monitoring</b>		
Breaker open/close monitoring	✓	✓
Synchronization time out monitoring	✓	✓
<b>Counter</b>		
Circuit breaker closure counter	✓	✓
<b>Listings/Approvals</b>		
UL / cUL / GOST-R / LR & ABS Marine	✓	✓
CE Marked	✓	✓
<b>Part Numbers</b>		
LS-511 (1A / 5A)	8440-1951 / 8440-1946	---
LS-521 (1A / 5A)	---	8440-1952 / 8440-1947
DIN-Rail mounting Kit for LS-511	8923-1746	---
DPC-RS-232 direct configuration cable	5417-557	
DPC-USB direct configuration cable	5417-1251	

© Woodward

All Rights Reserved

37522A - 2011/10/Stuttgart