




СИЛОВЫЕ КОНТАКТОРЫ

Соответствуют нормам: IEC 60947-1, IEC 60947-4, VDE 0660

Номинальный рабочий ток I _e при 400 В AC3 А	P _n при 400 В 50 Гц AC3 кВт	I _e /AC1 А	Вспомог. контакты 	Тип	Размеры (ахвхс) мм	Масса кг	Цена
С катушкой переменного тока							
9	4	20	1 0	CNM 9 10	45x75x85	0.37	
9	4	20	0 1	CNM 9 01	45x75x85	0.37	
12	5.5	20	1 0	CNM 12 10	45x75x85	0.38	
12	5.5	20	0 1	CNM 12 01	45x75x85	0.38	
12	5.5	20	1 1	CNM 12 11	45x75x102	0.47	
12	5.5	20	2 2	CNM 12 22	45x75x102	0.47	
16	7.5	30	1 1	CNM 16 11	45x90x113	0.50	
16	7.5	30	2 2	CNM 16 22	45x90x113	0.50	
22	11	30	1 1	CNM 22 11	45x90x113	0.51	
22	11	30	2 2	CNM 22 22	45x90x113	0.51	
30	15	35	1 1	CNM 30 11	45x90x113	0.52	
30	15	35	2 2	CNM 30 22	45x90x113	0.52	
36	18.5	45	2 2	CNM 36 22	70x94x95	0.63	
36	18.5	45	4 4	CNM 36 44	95x94x95	0.73	
45	22	60	2 2	CNM 45 22	87x114x111	1.26	
45	22	60	4 4	CNM 45 44	112x114x111	1.36	
60	30	70	2 2	CNM 60 22	87x114x111	1.27	
60	30	70	4 4	CNM 60 44	112x114x111	1.4	
75	37	100	2 2	CNM 75 22	100x132x142	2.27	
75	37	100	4 4	CNM 75 44	125x132x142	2.37	
90	45	110	2 2	CNM 90 22	100x132x142	2.28	
90	45	110	4 4	CNM 90 44	125x132x142	2.38	
110	55	115	2 2	CNM 110 22	100x132x142	2.29	
110	55	115	4 4	CNM 110 44	125x132x142	2.39	
140	75	160	2 2	CNM 140 22	135x180x189	5.1	
140	75	160	4 4	CNM 140 44	162x180x189	5.6	
170	90	200	2 2	CNM 170 22	135x180x189	5.2	
170	90	200	4 4	CNM 170 44	162x180x189	5.7	
200	105	250	2 2	CNM 200 22	135x180x189	5.3	
200	105	250	4 4	CNM 200 44	162x180x189	5.8	
250	132	300	2 2	CNM 250 22	160x200x226	8.4	
250	132	300	4 4	CNM 250 44	187x200x226	8.9	
315	160	390	2 2	CNM 315 22	160x200x226	8.5	
315	160	390	4 4	CNM 315 44	187x200x226	8.9	
400	200	400	2 2	CNM 400 22	160x200x226	8.5	
400	200	400	4 4	CNM 400 44	187x200x226	8.9	

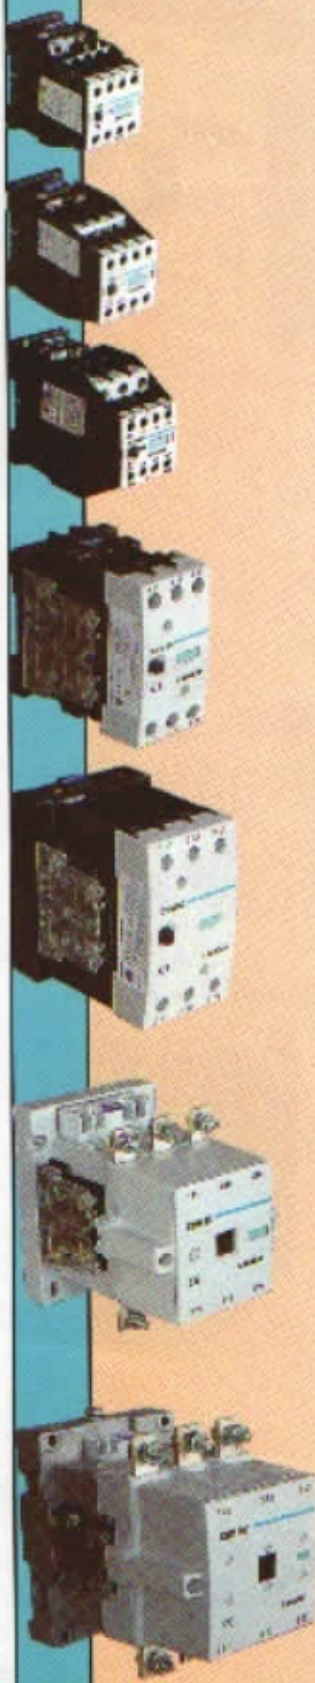

Соответствуют нормам: IEC 60947-1, IEC 60947-4, VDE 0660

Номинальный рабочий ток I_n при 400 В АСЗ А	P_n при 400 В 50 Гц АСЗ кВт	$I_e/AC1$ А	Вспомог. контакты 	Тип	Размеры (ахвхс) мм	Масса кг	Цена
9	4	20	1 0	CNB 9 10	45x90x129	0.60	
9	4	20	0 1	CNB 9 01	45x90x129	0.60	
12	5.5	20	1 0	CNB 12 10	45x90x129	0.60	
12	5.5	20	0 1	CNB 12 01	45x90x129	0.60	
12	5.5	20	1 1	CNB 12 11	45x90x145	0.68	
12	5.5	20	2 2	CNB 12 22	45x90x145	0.68	
16	7.5	30	1 1	CNB 16 11	45x90x155	0.74	
16	7.5	30	2 2	CNB 16 22	45x90x155	0.74	
22	11	30	1 1	CNB 22 11	45x90x155	0.80	
22	11	30	2 2	CNB 22 22	45x90x155	0.80	
30	15	35	1 1	CNB 30 11	45x90x155	0.80	
30	15	35	2 2	CNB 30 22	45x90x155	0.80	
36	18.5	45	2 1	CNM 36 21	70x94x95	0.63	
36	18.5	45	4 3	CNM 36 43	95x94x95	0.73	
45	22	60	2 1	CNM 45 21	87x114x111	1.26	
45	22	60	4 3	CNM 45 43	112x114x111	1.36	
60	30	70	2 1	CNM 60 21	87x114x111	1.27	
60	30	70	4 3	CNM 60 43	112x114x111	1.4	
75	37	100	2 2	CNM 75 22	100x132x142	2.27	
75	37	100	4 4	CNM 75 44	125x132x142	2.37	
90	45	110	2 2	CNM 90 22	100x132x142	2.28	
90	45	110	4 4	CNM 90 44	125x132x142	2.38	
110	55	115	2 2	CNM 110 22	100x132x142	2.29	
110	55	115	4 4	CNM 110 44	125x132x142	2.39	
140	75	160	2 2	CNM 140 22	135x180x189	5.1	
140	75	160	4 4	CNM 140 44	162x180x189	5.6	
170	90	200	2 2	CNM 170 22	135x180x189	5.2	
170	90	200	4 4	CNM 170 44	162x180x189	5.7	
200	105	250	2 2	CNM 200 22	135x180x189	5.3	
200	105	250	4 4	CNM 200 44	162x180x189	5.8	
250	132	300	2 2	CNM 250 22	160x200x226	8.4	
250	132	300	4 4	CNM 250 44	187x200x226	8.9	
315	160	390	2 2	CNM 315 22	160x200x226	8.5	
315	160	390	4 4	CNM 315 44	187x200x226	8.9	
400	200	400	2 2	CNM 400 22	160x200x226	8.5	
400	200	400	4 4	CNM 400 44	187x200x226	8.9	

